




Float switch design 4 SS...4... For mounting tank walls.

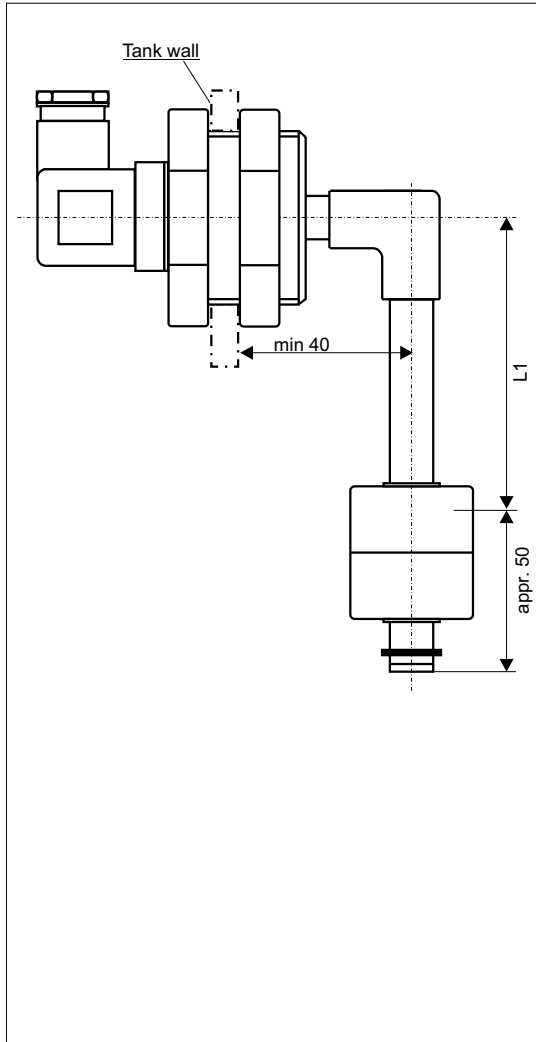

Terminal plans

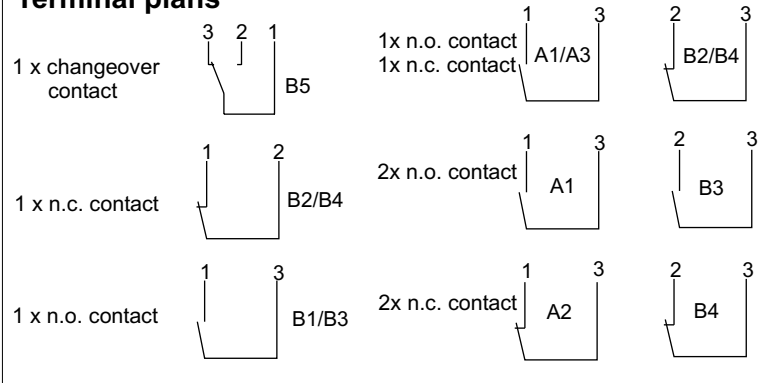

Type code

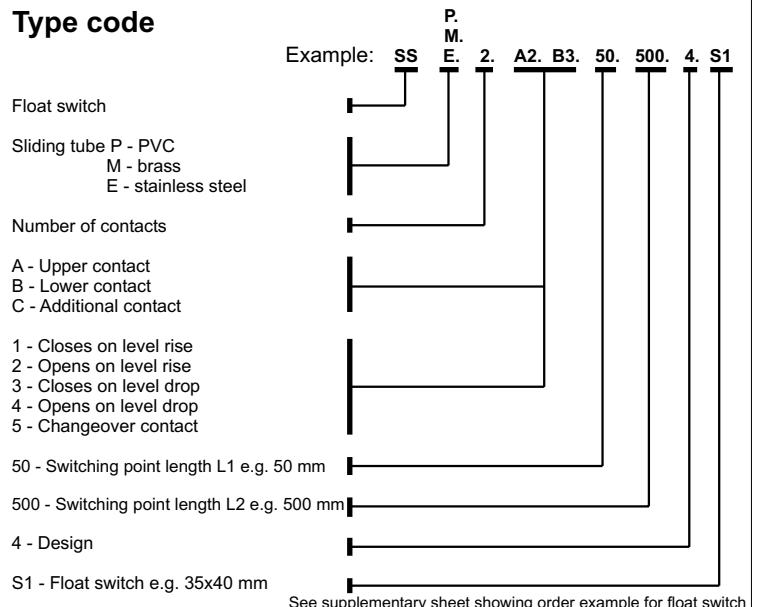

Technical data

Connection:	Right-angled plug as per DIN 43650
Fastening:	PVC screwed connection R 1¼"
Seal:	NBR
Sliding tube:	Other fastening methods available on request. Brass, dia. 12 mm; PVC dia. 12 mm; Stainless steel dia. 12 mm
Float switch:	S1 = PP dia. 35x40 mm = standard on request S4 = stainless steel dia. 44x53 mm
Reed contacts:	max. 2 x n.o. contact/n.c. contact or 1 x changeover contact
Switching voltage:	230 VAC
Switching current:	1 A
Switching capacity:	60 VA
Pressure:	Atmospheric
Temperature:	max. 80°C PVC 60°C - higher temperatures possible on request
Protection rating	IP 65